



PERFORMANCE PRODUCTS, INC.

9/26/07

PISTON INSTALLATION INSTRUCTIONS


Important - Before balancing, please check to make sure that you have the correct components. Used or altered parts are non-returnable.

PISTON TO CYLINDER WALL CLEARANCE

Although piston to wall clearance preferences vary somewhat among engine builders, we recommend the following:

	<u>Gauge Point</u> <u>Distance</u>	<u>Uncoated Skirt</u>	<u>Coated Skirt</u>
SB Chevy LS-1	1.100"	.005"	.0045"
SB Chevy Formula Won	1.100"	.005"	—
SB Chevy 2 and 4 Barrel	1.100"	.005"	—
SB Chevy Dirt Series	.850"	.005"	—
SB Chevy Sportsmaster	1.100"	.005"	—
BB Chevy	1.100"	.006"	—
Chrysler Hemi 5.7L	1.100"	.005"	.0045"
Ford Modular 4.6L and 5.4L	.850"	.0035"	.0030"
Sport Compact	1.100"	.004"	.0035"

Piston diameter must be measured at a gauge point, which is measured from the bottom of the oil ring. (See Fig. 1) Clearance is built into the piston based upon the finished bore size of the cylinder.

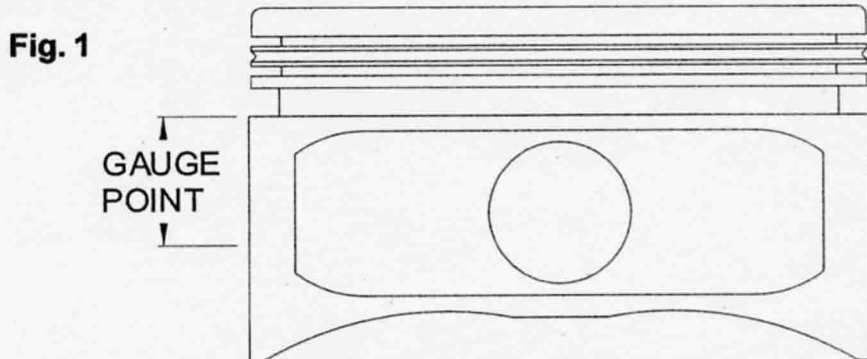

PISTON WRIST PIN OFFSET

Some Manley pistons are designed with offset wrist pins to reduce connecting rod angularity; such as the Chevrolet LS-1, Ford Modular 4.6L, 5.4L, Chrysler Hemi 5.7L and Sport Compact pistons. Please note the arrow on the top of each piston. This arrow **MUST** point to the front of the block. Also certain applications are marked with either a "D" or a "P". If marked with a "D", install on the driver side of the motor and a "P" is installed on the passenger side of the motor.

SPIRAL LOCKS AND ROUND WIRE LOCKS

Manley pistons are designed to retain the wrist pin with either single spiral locks (2 per piston), dual spiral locks (4 per piston), or round wire locks (2 per piston); depending on the application. Proper installation of locks is critical!

Please consult a professional engine builder or contact Manley Performance if you have any questions.

RECOMMENDED RINGS

DUE TO DISCREPANCIES IN RADIAL DEPTHS OF PISTON RINGS IN THE FIELD FROM VARIOUS MANUFACTURERS, WE ADVISE USING MANLEY PERFORMANCE PISTON RINGS ON ALL MANLEY PERFORMANCE PISTONS ENSURING MAXIMUM PERFORMANCE.

P.O. BOX 799 • 1960 SWARTHMORE AVENUE • LAKEWOOD, NEW JERSEY 08701
PHONE 732-905-3366 • FAX NO. 732- 905-3010